

**PROJECT NAME:**

Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:

**FEATURES AND BENEFITS**

The new VRV R series enables simultaneous operation of cooling and heating within a single refrigerant piping circuit by controlling the BS unit. This series also substantially improves energy efficiency by recycling exhaust heat.

Modern office buildings are highly airtight and subject to an increasing heat load due to the use of computers, lighting equipment and other office equipment. In these buildings some rooms may require artificial cooling even in winter, depending on the amount of sunshine received and the number of people in the room. In order to meet such requirements the Heat Recovery Series enables the simultaneous operation of cooling and heating by controlling the BS unit that switches cooling and heating. This series also substantially improves energy efficiency by recycling waste heat.

Development of a highly efficient heat exchanger utilizing of a two-split structure in a conventional system, two heat exchanger panels are utilized: one is used as an evaporator; while the other is used as a condenser. In the newly developed system, a two-split structure is utilized, with one panel split into two parts (top and bottom) at an optimal ratio depending on the capacity required for simultaneous cooling and heating operation. Heat radiation loss has been minimized, and the heat recovery efficiency and partial load characteristics have been improved.

VRT Smart Control optimally supply only for the needed capacity of indoor units Daikin developed VRT smart control by combining air volume control (VAV: Variable Air Volume) for indoor units with conventional VRT control, which optimizes compressor speed by calculating the required load for the entire system and optimal target refrigerant temperature based on data sent from each indoor unit. Coordination with the air volume control reduces compressor load and minimizes operation loss based on detailed control. VRT smart control ensures energy savings and comfortable air conditioning to meet actual operating conditions.

Comfort low operation sound night time quiet operation function for areas with stringent restrictions placed on outdoor sound levels, the outdoor unit can be set for low operation sound during the nighttime to meet sound restrictions. Large airflow, high static pressure and quiet technology.

Compact design with high performance highly integrated heat exchanger, optimized inner design to ensure smooth airflow, electric components were downsized and positioned in the dead space of the bell mouth side to decrease airflow resistance. Sufficient cooling for electrical components

High reliability at high ambient temperatures it is possible to keep operation stable even at high ambient temperatures by cooling the inverter power module.

Outer Rotor DC Motor (ODM) Only Daikin has adapted an ODM with the feature of stable rotation and volumetric efficiency.

Easy maintenance the electrical components are strategically located on the top which eases the maintenance process. Moreover, the heat exchanger on the front side can be used effectively to improve its performance. Without affecting the fan volume, the electric components are designed to be at the top and this utilizes dead space. This eliminates the problem of suction resistance.

Long piping length provides more design flexibility, which can match even large-sized buildings.

**EXTERNAL APPEARANCE**

**VRV R SERIES**






### SPECIFICATIONS

Model Name		<b>REYQ60TAY1 (REYQ20TAY1+REYQ20TAY1+REYQ20TAY1)</b>		
Power supply		3 phase, 380-415 V, 50 Hz		
*1 Cooling capacity	kcal/h	144.000		
	Btu/h	573.000		
	kW	168,0		
*2 Heating capacity	kcal/h	163.000		
	Btu/h	645.000		
	kW	189,0		
Casing colour		Ivory white (5Y7.5/1)		
Dimensions: (HxWxD)		mm (1,657x1,240x765)+(1,657x1,240x765)+ (1,657x1,240x765)		
Heat exchanger		Cross fin coil		
Compressor	Type	Hermetically sealed scroll type		
	Motor outputx Number of units	kW	(4.0x1)+(6.1x1)+(4.0x1)+(6.1x1)+ (4.0x1)+(6.1x1)	
	Starting method		Soft start	
Fan	Type	Propeller fan		
	Motor output	kW	(0.60x2)+(0.60x2)+(0.60x2)	
	Airflow rate	m <sup>3</sup> /min	269+269+269	
		l/s	4,483+4,483+4,483	
	cfm	9,496+9,496+9,496		
	Drive		Direct drive	
Connecting pipes	Liquid pipe	mm	f19.1 C1220T (Brazing connection)	
	Gas pipe	mm	f41.3 C1220T (Brazing connection)	
	High and low pressure gas pipe	mm	f34.9 C1220T (Brazing connection)	
Mass	kg	342+342+342		
*3 Sound pressure level	dB(A)	70		
Sound power level	dB(A)	91		
Safety devices		High pressure switch, Fan driver overload protector, Over current relay, Inverter overload protector		
Capacity control	%	3-100		
Refrigerant	Refrigerant name		R410A	
	Charge	kg	11.8+11.8+11.8	
	Control		Electronic expansion valve	
Refrigerator oil		Refer to the nameplate of compressor		
Standard accessories		Installation manual, Operation manual, Connection pipes, Clamps		
Drawing No.	Specifications	—		
	Sound level	—		

#### Notes:


- \*1. Indoor temp.: 27°CDB, 19°CWB / outdoor temp.: 35°CDB / Equivalent piping length: 7.5 m, level difference: 0 m.
  - \*2. Indoor temp.: 20°CDB, 15°CWB / outdoor temp.: 7°CDB, 6°CWB / Equivalent piping length: 7.5 m, level difference: 0 m.
  - \*3. Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m.
- During actual operation, these values are normally somewhat higher as a result of ambient conditions and oil recovery mode.  
When there is concern for noise the surrounding area such as residences, we recommend investigating the installation location and taking soundproofing measures.

### DIMENSIONS

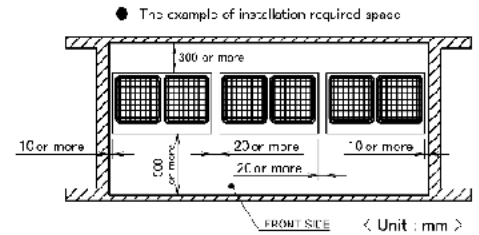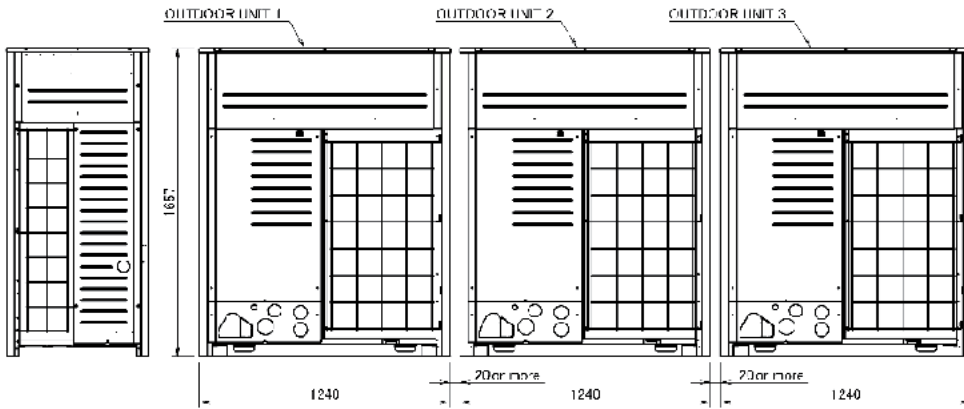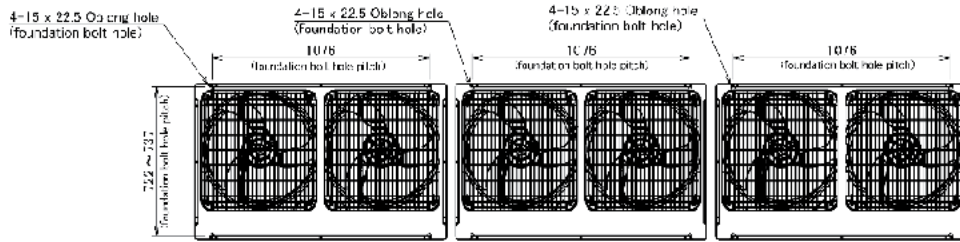

#### Note:

- For the wall height of the example for this installation required space area, Front side: 1800 mm, Suction side: 500 mm. Lateral side: No height limitation. This installation required space example has the standard of using operation at outdoor unit air temperature 35°C. In case the temperature is over 35°C of designed outdoor air temperature, or there is much heat load on all outdoor unit which its operation load is over the maximum capacity, make sure to enlarge the suction side space to be more than the value details which specified in drawings.
- In case of it is over the wall height as specified, make sure to add each dimension 1/2, 1 1/2 or more to the front side, suction side space as below diagram.
- When installation, select the most suitable pattern of installation service space (gap) in field space by considering pathway, ventilation.
- For front side space, make sure to install by considering the necessary space for refrigerant piping construction in the field.



SYSTEM NAME	OUTDOOR UNIT1	DWG. No.	OUTDOOR UNIT2	ENG. No.	OUTDOOR UNIT3	DWG. No.
RFY046T/TA	RFY216T/TA	3D09 8C6	RFY116T/TA	3D091336	RFY04T/TA	3D091906
RFY046T/TA	RFY216T/TA	3D09 8C6	RFY116T/TA	3D091336	RFY07T/TA	3D091906
RFY051T/TA	RFY216T/TA	3D09 8C6	RFY116T/TA	3D091336	RFY07T/TA	3D091906
RFY051T/TA	RFY216T/TA	3D09 8C6	RFY116T/TA	3D091336	RFY07T/TA	3D091906
REY05T/TA	REY216T/TA	3D09 8C6	REY116T/TA	3D091336	REY07T/TA	3D091906
REY056T/TA	REY220T/TA	3D09 8C6	REY116T/TA	3D091336	REY07T/TA	3D091906
REY056T/TA	REY220T/TA	3D09 8C6	REY220T/TA	3D091336	REY07T/TA	3D091906
REY060T/TA	REY220T/TA	3D09 8C6	REY220T/TA	3D091336	REY07T/TA	3D091906

Unit: mm  
3D091943A